


SPLIT


SPECIFICATIONS

MOUNTING		WALL RECESSED
POWER	[W]	2
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	185
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	92
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,67
GROSS WEIGHT	[kg]	0,70
COLOUR (HOUSING)		WHITE ~RAL9003 / WHITE
COLOUR (HOUSING)		WHITE ~RAL9003 / GOLD
CUT-OUT (FIXTURE)	[mm]	25x164
CUT-OUT (MOUNT. BOX)	[mm]	84x260
RECESSED DEPTH	[mm]	55 (MOUNTING BOX)
RECESSED DEPTH	[mm]	45 (FIXTURE)

*Luminous flux values are nominal LED data at a operating temperature of 25° C



LIGHT DISTRIBUTION

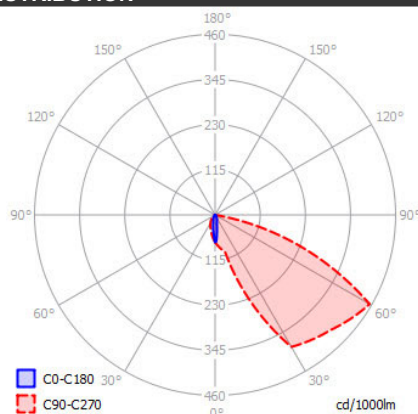


OPTIONS / OPTIONAL ACCESSORIES

Colours




CUT OUT DIMENSIONS


FIXTURE



MOUNTING BOX



FIXTURE DIMENSIONS

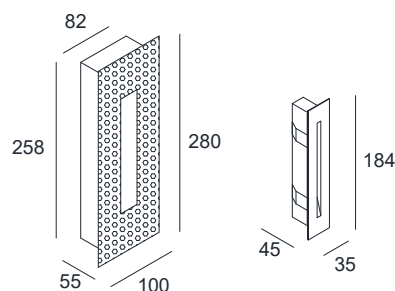

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING