

MIRA WALLWASHER 12,6W LED DIM TO WARM

SPECIFICATIONS


| | | |
|--------------------|---------|------------------|
| MOUNTING | | CEILING RECESSED |
| POWER | [W] | 12,6 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 40 - 1360 |
| LIGHT COLOUR | [K] | 1910 - 3000 |
| CRI | | >90 |
| BEAM ANGLE | [°] | - |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 93 |
| POWER SUPPLY | [V] [A] | 350mA CC |
| LED-DRIVER | | NOT INCLUDED |
| DIMMING | | SEE DRIVER |
| THROUGH-WIRING | | SEE DRIVER |
| MATERIAL | | ALUMINUM |
| INGRESS PROTECTION | | IP20 |
| PROTECTION CLASS | | III |
| NET WEIGHT | [kg] | 0,41 |
| GROSS WEIGHT | [kg] | 0,43 |
| COLOUR (HOUSING) | | WHITE ~RAL9003 |
| COLOUR (HOUSING) | | BLACK ~RAL9005 |
| CUT-OUT | [mm] | Ø80 |
| RECESSED DEPTH (H) | [mm] | 105 |

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

38°

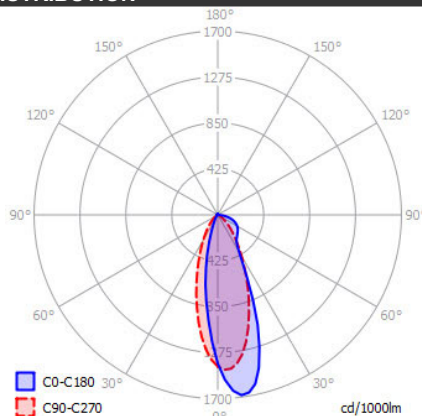

OPTIONS / OPTIONAL ACCESSORIES


Colours




white

black

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

MIRA WALLWASHER 14W LED

SPECIFICATIONS


| | | |
|--------------------|---------|------------------|
| MOUNTING | | CEILING RECESSED |
| POWER | [W] | 14 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 1550 / 1610 |
| LIGHT COLOUR | [K] | 2700 / 3000 |
| CRI | | >90 |
| BEAM ANGLE | [°] | - |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 99 |
| POWER SUPPLY | [V] [A] | 500mA CC |
| LED-DRIVER | | NOT INCLUDED |
| DIMMING | | SEE DRIVER |
| THROUGH-WIRING | | SEE DRIVER |
| MATERIAL | | ALUMINUM |
| INGRESS PROTECTION | | IP20 |
| PROTECTION CLASS | | III |
| NET WEIGHT | [kg] | 0,44 |
| GROSS WEIGHT | [kg] | 0,46 |
| COLOUR (HOUSING) | | WHITE ~RAL9003 |
| COLOUR (HOUSING) | | BLACK ~RAL9005 |
| CUT-OUT | [mm] | Ø80 |
| RECESSED DEPTH (H) | [mm] | 125 |

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

38°

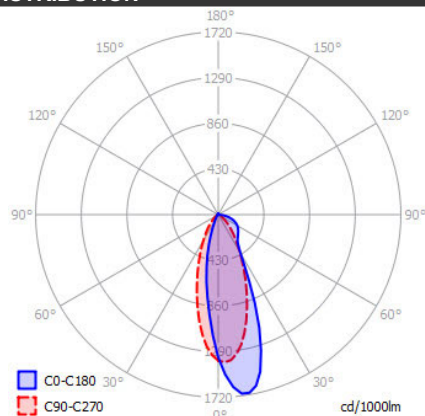

OPTIONS / OPTIONAL ACCESSORIES


Colours





white

black

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

MIRA WALLWASHER 9,3W LED


SPECIFICATIONS

| | | |
|--------------------|---------|------------------|
| MOUNTING | | CEILING RECESSED |
| POWER | [W] | 9,3 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 1100 / 1150 |
| LIGHT COLOUR | [K] | 2700 / 3000 |
| CRI | | >90 |
| BEAM ANGLE | [°] | - |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 120 |
| POWER SUPPLY | [V] [A] | 500mA CC |
| LED-DRIVER | | NOT INCLUDED |
| DIMMING | | SEE DRIVER |
| THROUGH-WIRING | | SEE DRIVER |
| MATERIAL | | ALUMINUM |
| INGRESS PROTECTION | | IP20 |
| PROTECTION CLASS | | III |
| NET WEIGHT | [kg] | 0,41 |
| GROSS WEIGHT | [kg] | 0,43 |
| COLOUR (HOUSING) | | WHITE ~RAL9003 |
| COLOUR (HOUSING) | | BLACK ~RAL9005 |
| CUT-OUT | [mm] | Ø80 |
| RECESSED DEPTH (H) | [mm] | 100 |

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

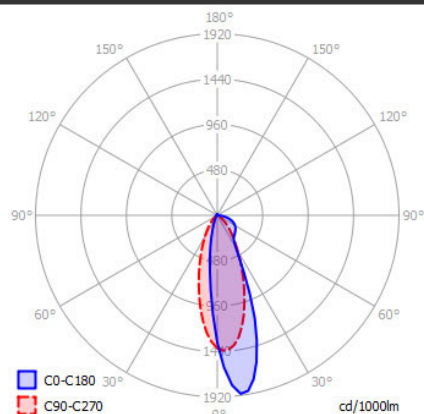


OPTIONS / OPTIONAL ACCESSORIES


Colours



CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

MIRA WALLWASHER GU10


SPECIFICATIONS

| | | |
|--------------------|---------|----------------------|
| MOUNTING | | CEILING RECESSED |
| POWER | [W] | 1xGU10 LED |
| LAMP | | NOT INCLUDED |
| LUMINOUS FLUX* | [lm] | - |
| LIGHT COLOUR | [K] | - |
| CRI | | - |
| BEAM ANGLE | [°] | - |
| AVERAGE LIFETIME | [h] | - |
| LUMINOUS EFFICACY | [lm/W] | - |
| POWER SUPPLY | [V] [A] | 220-240V AC 50/60 Hz |
| LED-DRIVER | | - |
| DIMMING | | SEE LAMP |
| THROUGH-WIRING | | - |
| MATERIAL | | ALUMINUM |
| INGRESS PROTECTION | | IP20 |
| PROTECTION CLASS | | II |
| NET WEIGHT | [kg] | 0,36 |
| GROSS WEIGHT | [kg] | 0,38 |
| COLOUR (HOUSING) | | WHITE ~RAL9003 |
| COLOUR (HOUSING) | | BLACK ~RAL9005 |
| CUT-OUT | [mm] | Ø80 |
| RECESSED DEPTH (H) | [mm] | 130 |

*Luminous flux values are nominal LED data at a operating temperature of 25° C




LIGHT DISTRIBUTION

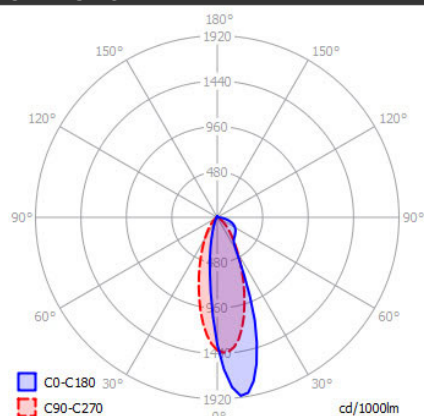


OPTIONS / OPTIONAL ACCESSORIES


Colours



CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dlsighting.com

***DLS**
LIGHTING