

CLIPPO EP 13W LED DIM TO WARM


SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	13
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	120-1100
LIGHT COLOUR	[K]	1910-3000
CRI		>90
BEAM ANGLE	[°]	33 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	84
POWER SUPPLY	[V] [A]	350mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,57
GROSS WEIGHT	[kg]	0,60
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø90
RECESSED DEPTH (H)	[mm]	45



LIGHT DISTRIBUTION

33°

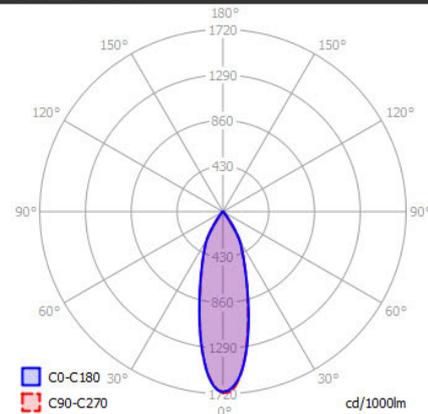

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	24 / 50
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD



Colours




white/white

white/gold


black/black

black/gold

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING

CLIPPO EP 14W LED


SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	14
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	1310 / 1375
LIGHT COLOUR	[K]	2700 / 3000
CRI		>90
BEAM ANGLE	[°]	32 (default)
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	98
POWER SUPPLY	[V] [A]	500mA CC
LED-DRIVER		NOT INCLUDED
DIMMING		SEE DRIVER
THROUGH-WIRING		SEE DRIVER
MATERIAL		ALUMINIUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,57
GROSS WEIGHT	[kg]	0,60
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005
CUT-OUT	[mm]	Ø90
RECESSED DEPTH (H)	[mm]	45



LIGHT DISTRIBUTION

32°

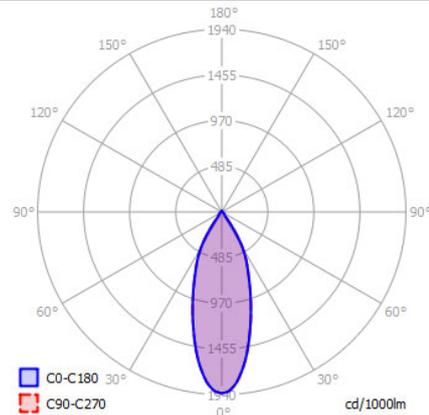

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

REFLECTOR	[°]	15 / 48
LENS	[°]	18
HONEY COMB LOUVER		BLACK
ANTI GLARE RING		GOLD



Colours




white/white

white/gold



black/black

black/gold

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

*DLS
LIGHTING