

CREOS


SPECIFICATIONS

MOUNTING		WALL
POWER	[W]	2x6
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2x620
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	40
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	103

POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		NO


MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,74
GROSS WEIGHT	[kg]	0,78
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9005

*Luminous flux values are nominal LED data at a operating temperature of 25° C

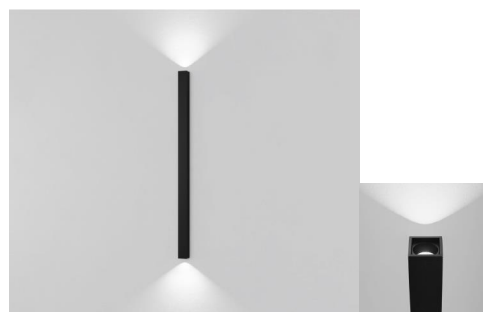


LIGHT DISTRIBUTION

40°

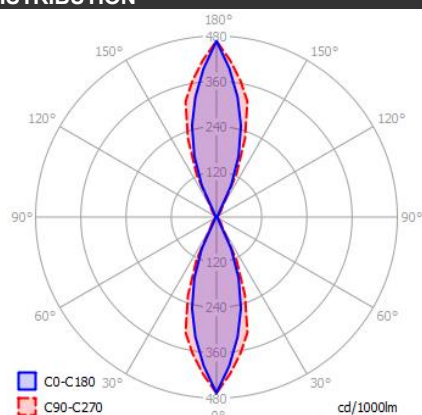

OPTIONS / OPTIONAL ACCESSORIES


Colours



white

black

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dlsighting.com

***DLS**
LIGHTING