


NO FRAME 80 ROUND GU10

SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	1xGU10 LED
LAMP		NOT INCLUDED
LUMINOUS FLUX*	[lm]	-
LIGHT COLOUR	[K]	-
CRI		-
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	-
LUMINOUS EFFICACY	[lm/W]	-
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		SEE LAMP
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		II
NET WEIGHT	[kg]	0,57
GROSS WEIGHT	[kg]	0,60
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9004
CUT-OUT	[mm]	ø89
RECESSED DEPTH (H)	[mm]	140



LIGHT DISTRIBUTION (OSRAM LAMP) 36°

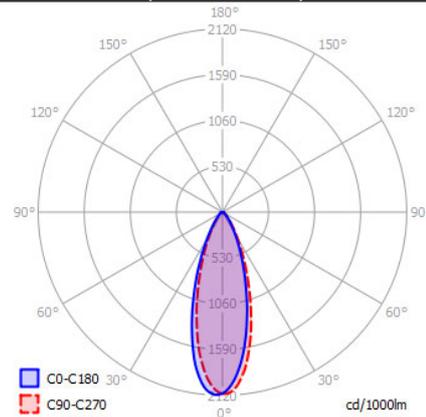

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

RECESSED FRAME KIT	WHITE
RECESSED FRAME KIT	BLACK



Ø 89


Colours



white

black

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING


NO FRAME 80 ROUND GU5,3

SPECIFICATIONS

MOUNTING		CEILING RECESSED
POWER	[W]	1xGU5,3 LED
LAMP		NOT INCLUDED
LUMINOUS FLUX*	[lm]	-
LIGHT COLOUR	[K]	-
CRI		-
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	-
LUMINOUS EFFICACY	[lm/W]	-
POWER SUPPLY	[V] [A]	12V AC
LED-DRIVER		-
DIMMING		SEE LAMP
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		III
NET WEIGHT	[kg]	0,57
GROSS WEIGHT	[kg]	0,60
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		BLACK ~RAL9004
CUT-OUT	[mm]	ø89
RECESSED DEPTH (H)	[mm]	120



LIGHT DISTRIBUTION (OSRAM LAMP) 36°

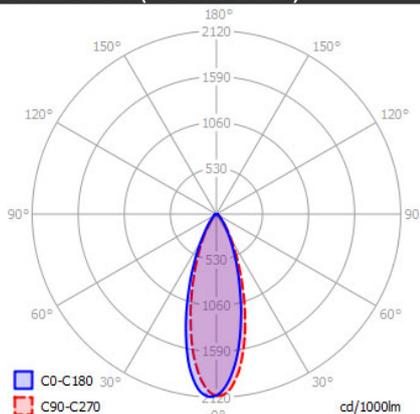

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

RECESSED FRAME KIT	WHITE
RECESSED FRAME KIT	BLACK



Ø 89


Colours



white

black

CUT OUT DIMENSIONS



FIXTURE DIMENSIONS



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING