

ATLANTIS 75 LED


SPECIFICATIONS

MOUNTING		GROUND
POWER	[W]	5
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	755
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	25
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	151
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		YES (JUNCTION BOX IV)
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP68
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,30
GROSS WEIGHT	[kg]	1,35
COLOUR (HOUSING)		BLACK ~RAL9005
OUTLET CABLE		2,5m H05RN-F 3x0,75mm ²



LIGHT DISTRIBUTION

25°

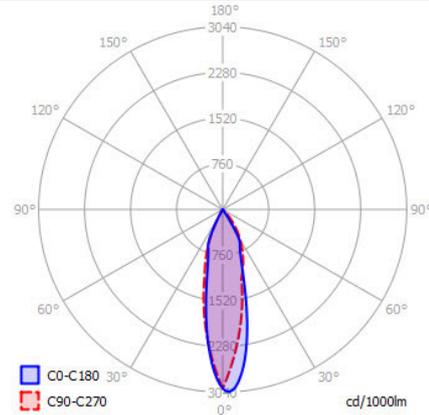


*Luminous flux values are nominal LED data at a operating temperature of 25° C


OPTIONS / OPTIONAL ACCESSORIES

MICRO JUNCTION BOX	II	BLACK
MICRO JUNCTION BOX	IV	BLACK
GROUND SPIKE		BLACK
MOUNTING BOX		BLACK
TREE STRAP		BLACK


Colours

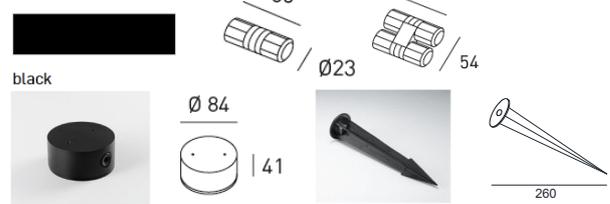

MOUNTING DIMENSIONS(WITHOUT SPIKE)




FIXTURE DIMENSIONS

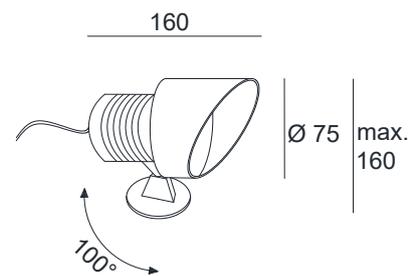

tree strap:

max. 2000



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING


ATLANTIS 75 GU10

SPECIFICATIONS

MOUNTING		GROUND
POWER	[W]	1xGU10 LED
LAMP		NOT INCLUDED
LUMINOUS FLUX*	[lm]	-
LIGHT COLOUR	[K]	-
CRI		-
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	-
LUMINOUS EFFICACY	[lm/W]	-
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		SEE LAMP
THROUGH-WIRING		YES (JUNCTION BOX IV)
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP65
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,30
GROSS WEIGHT	[kg]	1,35
COLOUR (HOUSING)		BLACK ~RAL9005
OUTLET CABLE		2,5m H05RN-F 3x0,75mm ²



LIGHT DISTRIBUTION (OSRAM LAMP) 36°

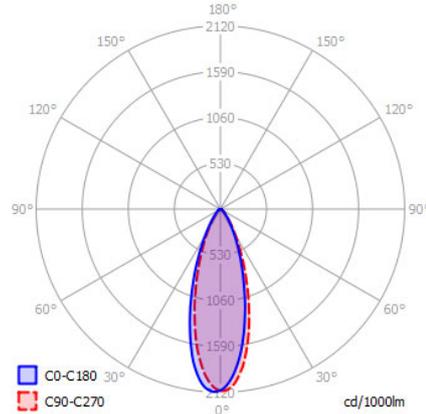


*Luminous flux values are nominal LED data at a operating temperature of 25° C


OPTIONS / OPTIONAL ACCESSORIES

MICRO JUNCTION BOX	II	BLACK
MICRO JUNCTION BOX	IV	BLACK
GROUND SPIKE		BLACK
MOUNTING BOX		BLACK
TREE STRAP		BLACK


Colours

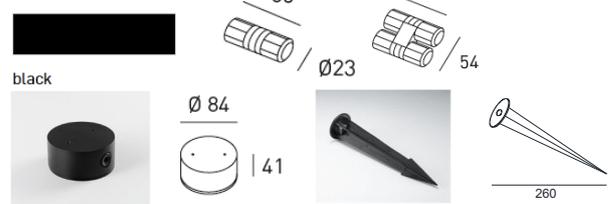

MOUNTING DIMENSIONS(WITHOUT SPIKE)




FIXTURE DIMENSIONS

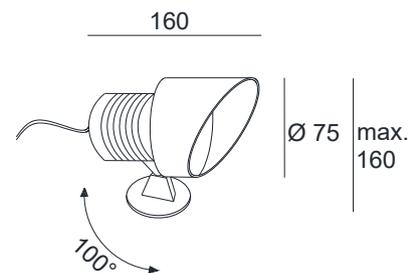

tree strap:

max. 2000



DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING