

# ARKTIS MINI


## SPECIFICATIONS

MOUNTING		GROUND
POWER	[W]	4
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	420
LIGHT COLOUR	[K]	3000
CRI		>90
BEAM ANGLE	[°]	30
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	105
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		YES (JUNCTION BOX IV)
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP65
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,52
GROSS WEIGHT	[kg]	0,54
COLOUR (HOUSING)		BLACK ~RAL9005
OUTLET CABLE		2,5m H05RN-F 3x1,0mm <sup>2</sup>



## LIGHT DISTRIBUTION

30°

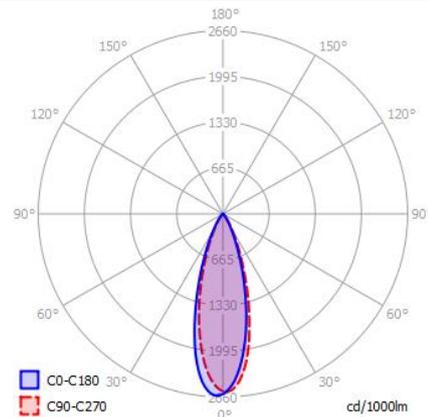

\*Luminous flux values are nominal LED data at a operating temperature of 25° C

## OPTIONS / OPTIONAL ACCESSORIES


MICRO JUNCTION BOX	II	BLACK
MICRO JUNCTION BOX	IV	BLACK

## Colours



black



## MOUNTING DIMENSIONS(WITHOUT SPIKE)



## FIXTURE DIMENSIONS

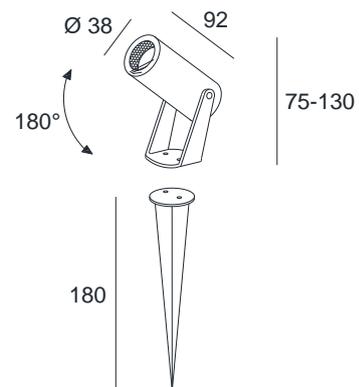

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING