

ZOOM TELE

SPECIFICATIONS

MOUNTING		SURFACE	
POWER	[W]		2
LAMP			built-in LED
LUMINOUS FLUX*	[lm]		190
LIGHT COLOUR	[K]		3000
CRI			>90
BEAM ANGLE	[°]		15 - 60
AVERAGE LIFETIME	[h]		L80/B50.000
LUMINOUS EFFICACY	[lm/W]		95
POWER SUPPLY	[V] [A]		500mA cc
LED-DRIVER			NOT INCLUDED
DIMMING			SEE DRIVER
THROUGH-WIRING			SEE DRIVER
MATERIAL			BRASS
INGRESS PROTECTION			IP20
PROTECTION CLASS			III
NET WEIGHT	[kg]		0,06
GROSS WEIGHT	[kg]		0,07
COLOUR (HOUSING)		BLACK ~RAL9005	
COLOUR (HOUSING)		CHROME	
COLOUR (HOUSING)		PLATINUM	



LIGHT DISTRIBUTION

n/a

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

2700K and 4000K LED on request

Colours




black



chrome

platinum

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

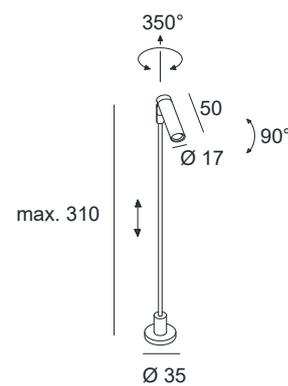

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING