

# GEO

## SPECIFICATIONS


MOUNTING		CEILING / WALL
POWER	[W]	5
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	370
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	24
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	74
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		NO
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	0,63
GROSS WEIGHT	[kg]	0,65
COLOUR (HOUSING)		WHITE ~RAL9004
COLOUR (HOUSING)		BLACK ~RAL9016

\*Luminous flux values are nominal LED data at a operating temperature of 25° C




## LIGHT DISTRIBUTION

24°

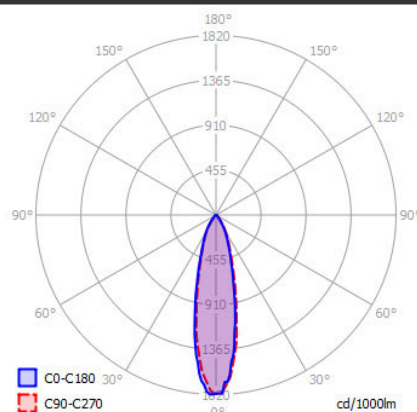

## OPTIONS / OPTIONAL ACCESSORIES


### Colours




white

black

## MOUNTING DIMENSIONS

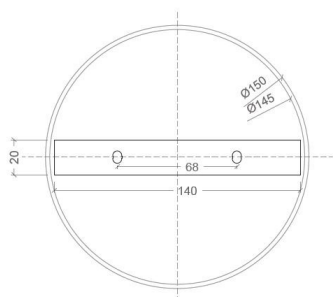

## FIXTURE DIMENSIONS

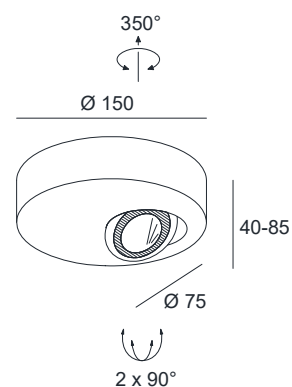

DLS LIGHTING

www.dslighting.com

**\*DLS**  
LIGHTING